

SDS/SLSH Transformers



SDS / SLSH series transformers are designed to provide electrical energy supply of up to 6 units. It is equipped with primary and secondary insurance. These devices convert the system voltage of 230V/50 Hz to 48/53 Hz. SLSH




SDS - Cabinetless Models Capacity Values


Model	Power (kW)	a (mm)	b (mm)	c (mm)	Cl (mm)	d (mm)	e (mm)	f (mm)	Weight (kg)	Code
SDS 2.0	2	176	132	228	40-60	112	102	10	19,4	40200020
SDS 2.5	2,5	200	135	260	40-60	124	107	10	23	40200025
SDS 3.0	3	200	147	260	40-60	124	119	10	27,5	40200030
SDS 3.5	3,5	200	173	260	40-60	124	145	10	34,5	40200035
SDS 4.0	4	240	153	310	60-80	144	125	10	34,5	40200040
SDS 4.5	4,5	240	168	310	60-80	144	140	10	40	40200045
SDS 5.0	5	240	183	310	60-80	144	155	10	46,5	40200050
SDS 6.3	6,3	280	173	365	60-90	176	143	12	54	40200063
SDS 7.5	7,5	280	188	365	60-90	176	158	12	63	40200075
SDS 8.8	8,8	280	203	365	60-90	176	173	12	77	40200088
SDS 10.0	10	280	233	365	60-90	176	203	12	91	40200100

SLSH - Cabin Models Capacity Values

Model	Power (VA)	a (mm)	b (mm)	c (mm)	Cl (mm)	PG	Weight (kg)	Code
SLSH 2.0	2	500	275	350	380	16	28,4	40201020
SLSH2.5	2,5	500	275	350	380	16	32	40201025
SLSH 3.0	3	500	275	350	380	16	36,5	40201030
SLSH 3.5	3,5	500	275	350	380	16	41	40201035
SLSH 4.0	4	500	275	350	380	16	46	40201040
SLSH4.5	4,5	650	285	450	480	16	52,5	40201045
SLSH 5.0	5	650	285	450	480	16	59	40201050
SLSH 6.3	6,3	650	285	450	480	16	66,5	40201063
SLSH 7.5	7,5	650	285	450	480	16	75,5	40201075
SLSH8.8	8,8	520	520	500	545	23	99	40201088
SLSH10.0	10	520	520	500	545	23	113	40201100

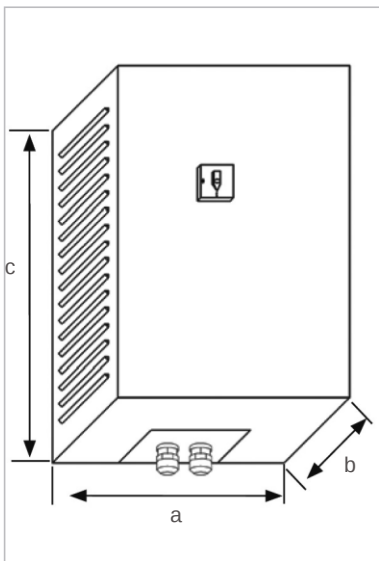

SLSH Transformer

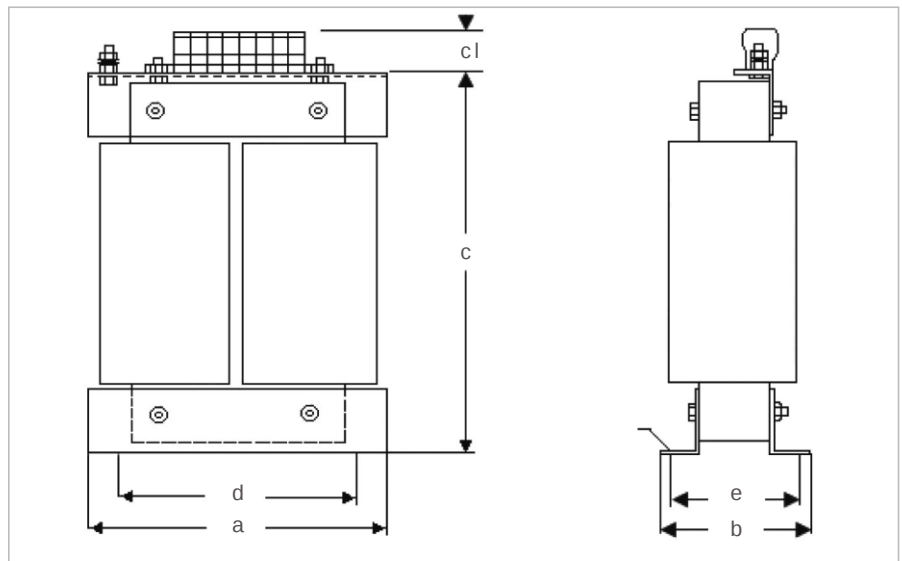

SDS Transformer