



XTP Series electrode steam humidifiers from DriSteem's provide humidification for a wide range of buildings, including health care, commercial, industrial, and government facilities. Easy installation and minimal maintenance make XT Series one of the most affordable humidification systems to purchase and install.

## **XTP-E** series steam humidifier specifications

- · Each unit capacity is 2-130 kg/h and 4 units can be connected together to increase the capacity up to 520 kg/h.
- Disperses steam into ductwork or open spaces.
- Works with water conductivity from 125-1250 µS/cm.
- Easy to replace steam cylinder
- · Compact in size to fit into small spaces with attractive cabinet for finished space applications.
- Possibility for updating program and save datas with USB port.
- Modbus and optional BACnet or LonTalk for inter-operability with multiple • building automation systems.
- Automatic drain and fill events for optimized humidifier performance based • on water



Vapor - 4 control panels

## Capacities, Electrical Specification, Dimensions and Weights

Model	Max. power (kW)	Max. steam capacity (kg/h)	Full load current (Amps) 1 Phase 3 Phase			Shipping weight	Max. operating	Dimensions (mm)			Code
			240 V	480 V	480 V	(kg)	weight (kg)	Width	Height	Depth	
XTP002	1.7	2	7	-	-	17	17	370	523	221	40121002
XTP003	3.3	5	14	7	4	17	17	370	523	221	40121003
XTP006	6.0	8	25	13	7	17	21	370	523	221	40121006
XTP010	10.0	14	-	-	12	23	36	450	612	300	40121010
XTP017	16.5	22	-	-	20	23	36	450	612	300	40121017
XTP025	25.0	34	-	-	30	29	52	504	650	340	40121025
XTP033	33.3	45	-	-	40	29	52	504	650	340	40121033
XTP042	41.7	57	-	-	50	29	52	504	650	340	40121042
XTP048	48	65	-	-	58	29	52	504	650	340	40121048
XTP050"	50.0	68	-	-	30	63	99	1005	650	340	40121050
XTP067"	66.7	90	-	-	40	63	99	1005	650	340	40121067
XTP083"	83.3	113	-	-	50	63	99	1005	650	340	40121083
XTP096"	95.7	130	-	-	2x58	63	99	1005	650	340	40121096


XTP models are controlled by a Vapor-Logic controller.

A For inclusion are controlled by a vapor-Logic controller.
 For circuit building requirements, please contact our company for XT Series installation, application and maintenance manual.
 These models have 2 steam cylinders and require an independent steam connection.





**XTP-E Series Humidifier Parts** 

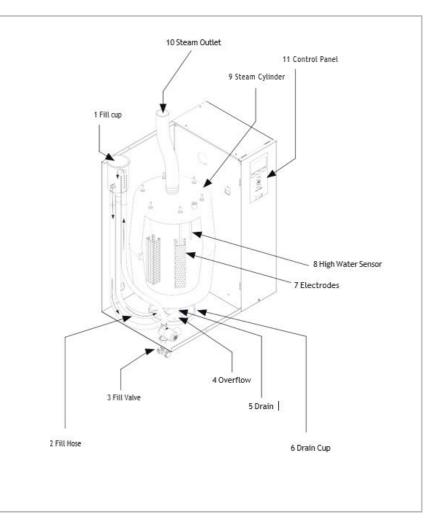

- XTP-E Steam Distribution Fan
  Suitable for indoor spaces and rooms without ventilation areas.
  The XTP-E series is mounted on top of the humidifier or on the wall.
  Steam capacity is up to 22.7 kg/h.

## **XTP-E Technical Information**

Model	Max. power (kW)	Max. steam capacity (kg/h)	Current 115 V 50/60 Hz	Transport Weight (kg)	Max. operating . weight (kg)	Dimensions (mm)			Code
						Width	Height	Depth	
SDU-006E2	1.7	9.1	0.16 A	5.7	4.3	373	152	198	40120006
SDU-017E2	2.3	22.7	0.23 A	12.5	11.3	455	350	279	40120007